


PLAN VIEW STAKING DETAIL

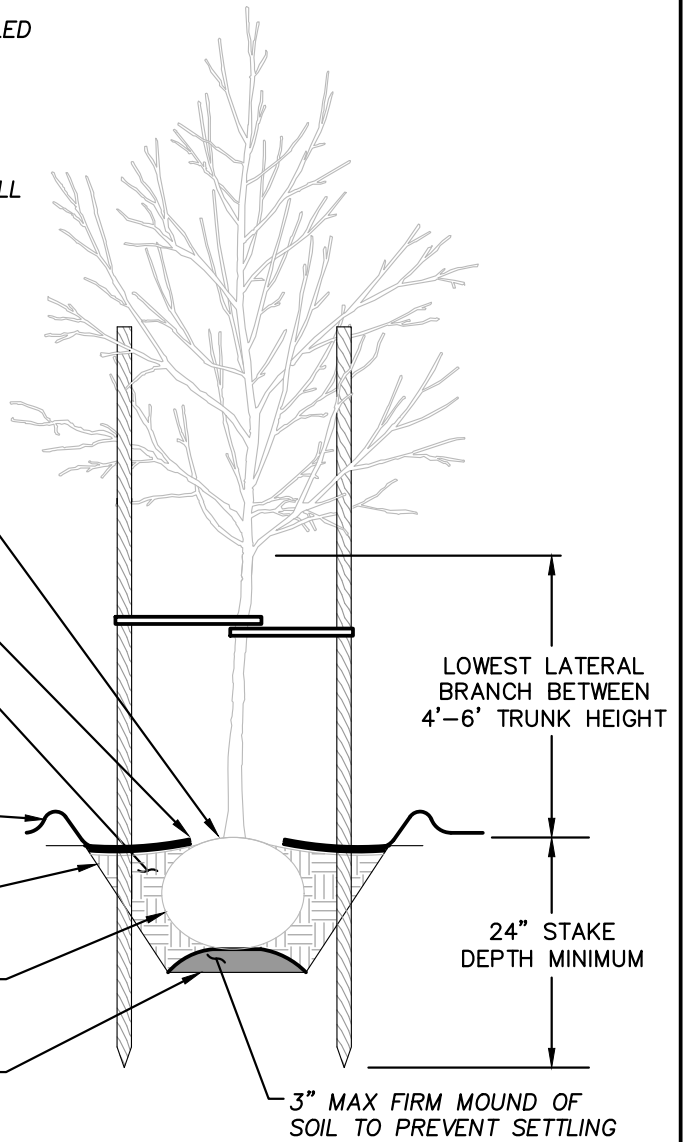

SECTION VIEW PLANTING DETAIL

- BOTTOM OF PLANTING HOLE = ROOTBALL WIDTH
- TOP OF PLANTING HOLE = 3X ROOTBALL WIDTH

NOTES:

1. ALL TREES SHALL MEET ANSI AZ60.1 AND OMC 16.60 STANDARDS.
2. LOOK FOR EXCESSIVE SOIL ON THE ROOT BALL COVERING ROOT FLARE AND REMOVE TO EXPOSE ROOT FLARE.
3. BOTTOM OF ROOT FLARE SHALL BE AT FINISH GRADE IN WELL DRAINED SOIL AND 2" ABOVE FINISH GRADE IN POORLY DRAINED SOIL.
4. B&B TREES: COMPLETELY REMOVE WIRE BASKET AND TREATED OR SYNTHETIC BURLAP AND TWINE. REMOVE NATURAL TWINE AND BURLAP FROM TOP AND SIDES OF ROOTBALL.
5. CONTAINERIZED TREES: SHAVE THE OUTER 1-2" OF SOIL FROM ROOT BALL WITH SHARP KNIFE.
6. GROW BAG TREES: REMOVE BAG COMPLETELY.
7. STAKE ONLY IF REQUIRED BY PROJECT FORESTER OR NECESSARY FOR TREE STABILITY. REMOVE STAKES AFTER 1 YEAR.
8. PRUNE DAMAGED OR BROKEN BRANCHES. NO OTHER PRUNING SHALL BE DONE AT PLANTING.

APPROVED BY	REVISED DATE	CITY OF OLYMPIA	STD. DWG. NO.
FRAN R. EIDE, PE	11/8/2018	TREE PLANTING IN PLANTING STRIP	4-50
CITY ENGINEER			